

Y-line

Design orientated handleless

- Base units carcase height 768 mm, ergonomic carcase and low plinth panel
- Base units carcase depth 351 mm, 475 mm,
 575 mm. 625 mm
- With worktop depth in 600 mm as standard (575 mm)
- Tall units with continuous fronts up to 2208 mm carcase height
- Optimum loading capacity of the worktop due to the material properties of the handle rails.

Y-line+_{plus}

- Base units carcase height 832 mm
- Tall units with continuous fronts up to 2272 mm carcase height



X-line

Handleless and classic

- Base units carcase height 768 mm, ergonomic carcase and low plinth panel
- Base units carcase depth 351 mm, 475 mm,
 575 mm. 625 mm
- With worktop depth in 600 mm as standard (575 mm)
- Tall units with continuous fronts up to 2208 mm carcase height
- Optimum loading capacity of the worktop due to the material properties of the handle rails.
- Possible with frame front

X-line+_{plus}

- Base units carcase height 832 mm
- Tall units with continuous fronts up to 2272 mm carcase height



proline 128

Ergonomic and diverse

- Base units carcase height 768 mm, ergonomic carcase and low plinth panel
- Base units carcase depth 351 mm, 465 mm, 565 mm, 615 mm
- Tall units with continuous fronts up to 2208 mm carcase height

classicline

Functional and price-oriented

- Base units carcase height 704 mm with ergonomic plinth
- Base units carcase depth 351 mm und 565 mm
- Tall units with continuous fronts up to 2144 mm carcase height

proline 128 plus

- Base units carcase height 832 mm
- Tall units with continuous fronts up to 2272 mm carcase height







_____ 03 -

_____ 01 -

Y-line

The unique handleless kitchen. Integrated handle profile, clean lines, and front return panels create a seamless front aesthetic.

Uncompromising design with maximum creative freedom.







02

4 Product lines - 1 Plattform - 1 Quality

- Consistent programs and colours
- Consistent technology behind the front as well
- Same quality standard



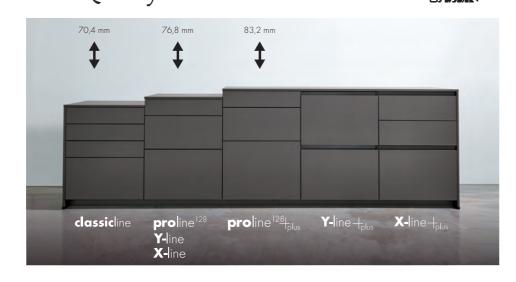

Carcase composition and Quality

Maximum stability is ensured by 16 mm thick carcase walls, a 5 mm thick rear panel with a solid wood cross beam, and 18 mm shelves with metal support pegs and tilt-safety device.



04


Carcase colour and edge variations

- Inside white with more than 140 different visible sides
- Inside and outside in stratus grey pearl with more than 75 edge variations







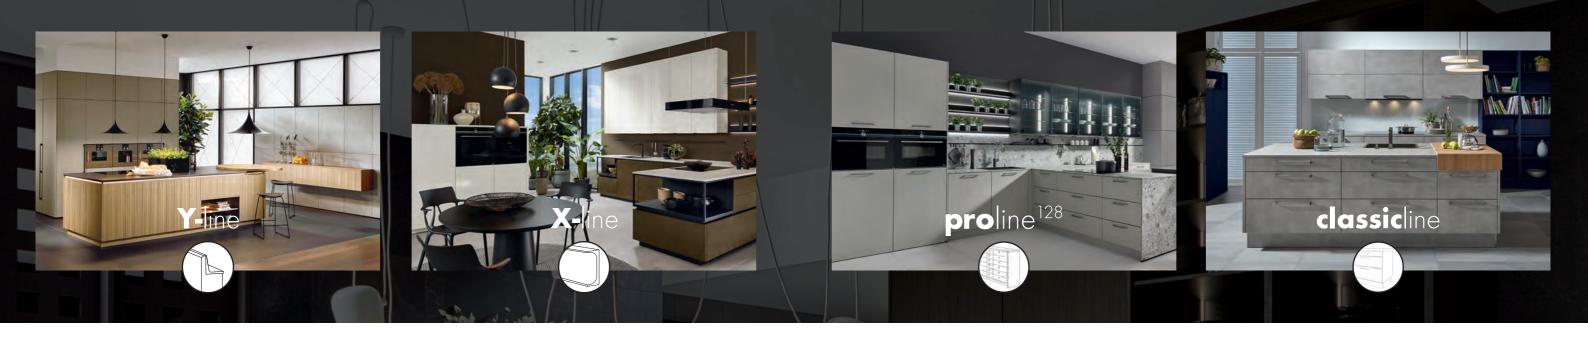

_____ 05 -

Drawer-Pull-out system

proTech X **pro**Tech **X** combines modern purist frame design with technical precision:



proTech X pure



proTech X pureMaxi (optional)



proTech X glassCase



(optional from around April 2026)


— 06 -

Interior fittings

Customizable interior fittings for optimal organization. From elegant cutlery inserts to clever organizational accessories.









Storage solutions

Storage solutions with elegant railing systems, minimalist shelves, or anthracite-colored wire baskets - perfectly coordinated with **pro**Tech **X** in titanium or anthracite.









08

Opening Assistance

- Drawers and pull-outs: mechanical or electrical
- Wall units: mechanical or electrical
- Hinge doors: mechanical







_____ 07 —



- 09 -

Plinth Panel

More than 100 versions - 6 ergonomic plinth heights

- 65 mm
- 90 mm
- 115 mm
- 140 mm
- 165 mm

• 215 mm





Perfect Join

Horizontal and vertical joint width of 4 mm for a perfected aesthetic – across all product lines.

Consistent lines emphasise the clean, design-oriented appearance.



- 10 -

Surrounding Design

10, 16, 25 and 50 mm panel,

• 36 mm design panels and panel material in many colour combinations.






Hinges 107°, dampened

Doors close gently and quietly thanks to integrated damping in the hinges – stylishly finished with a metal cover cap.



11

- 12 -

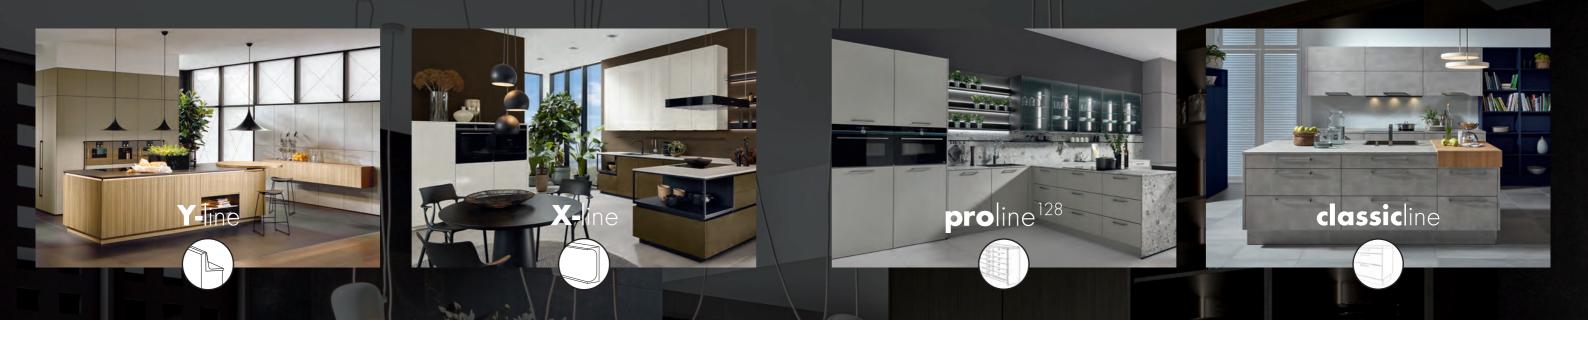

_____ 13 -

Wall units

351 mm deep

- Usable internal depth = 329 mm
- Cabinet bottom in full depth up to the wall for a perfect finish

565 mm or 575 mm deep

• usable internal depth = 543 mm



Expanded standard assortment

- 1152 mm or 1440 mm high wall units
- Wall-hung base units in **X-**line,**Y-**line and **pro**line¹²⁸
- 1500 | 1800 mm wide base units
- Wall units 351 mm or 565|575 mm depth



— 14

Handles and Knobs

Handleless is not an obligation, our diverse collection offers a large selection of current trends.




Front Extension

- To the floor:
 Hinged doors and pull-outs
 up to a maximum of 15 mm
 above the floor
- To the top:
 hinged doors extended
 above the caracase, up
 to a maximum of 230 mm



_____ 15 -

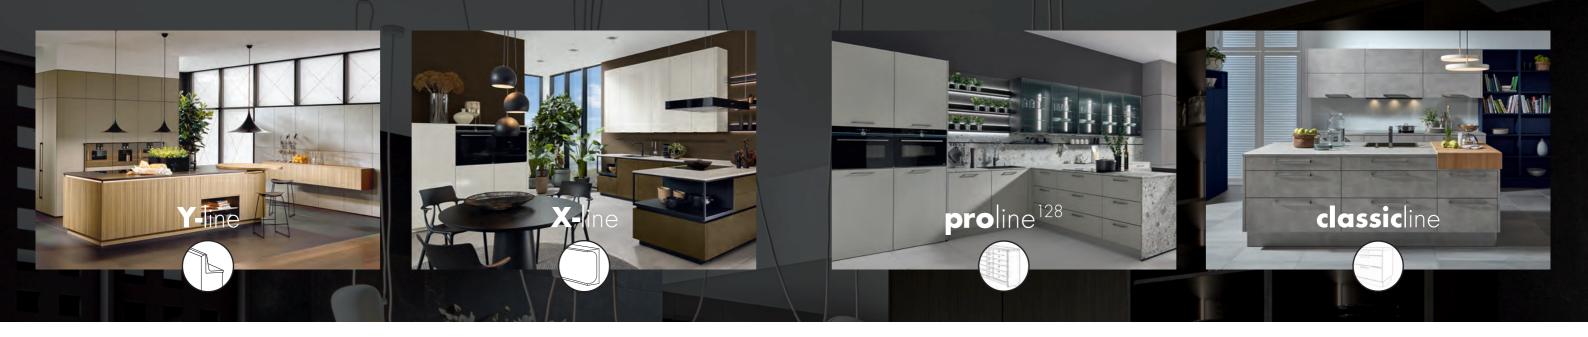

MIX. MATCH

More than 220 Fronts

In different variants and designs: matt|glossy fronts, wood|stone decors, frame | lamella fronts and much more.



_____ 18

UV-lacquer Fronts high gloss

- The unique real lacquer front in PG 2
- No lacquer laminate!



— 19

Ultra matt lacquer Fronts

- With "Sense of Touch" surface in PG 2
- Backside finished in door colour
- UV Lacquer, no lacquer laminate
- Easy to clean due to the special surface







- 20 -


Organic glass Fronts

- In glossy and matt finishes
- Colour-stable, scratchresistant, hygienic, easy care, of high quality and shock-resistant
- Backside finished in door colour







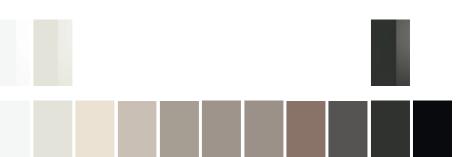





_____ 21 -

More than 50 basic Colours

For fronts, visible sides and plinths - without surcharge in all product lines!





RAL- and NCS-Colours

Wide colour spectrum for adaptation to individual needs and endless combination possibilities.

- 192 RAL-Classic-Colours
- 1950 NCS-Colours (Natural Colour System)



_____ 22 _____

Edgebanding - Front, Carcase, Surrounding

Improved thermal resistance through physical/chemical setting. Optimum protection against moisture intrusion.



Living and Dressing

Individual planning in a uniform style possible across all living areas.

More inspiration in the brochure "Living Spaces"!





43

— 24 **–**

